



安装外形图 Overall dimension

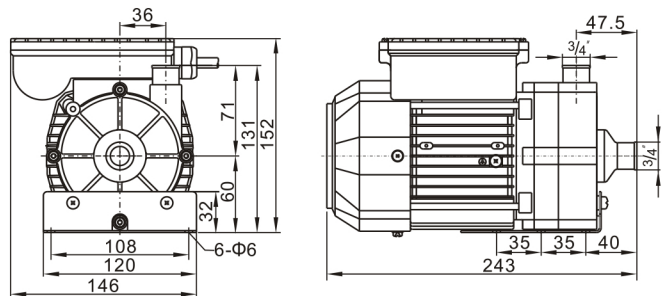


性能曲线 Performance curves

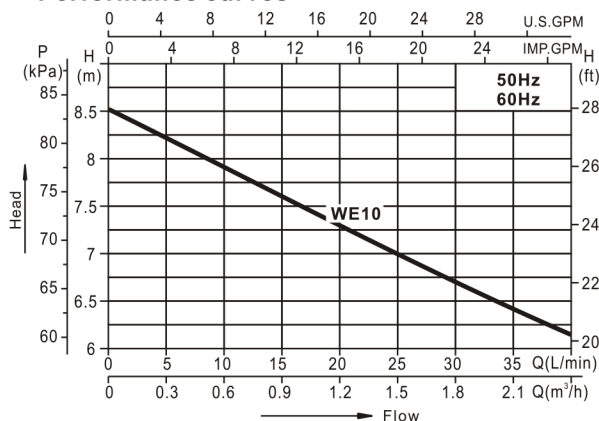

浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

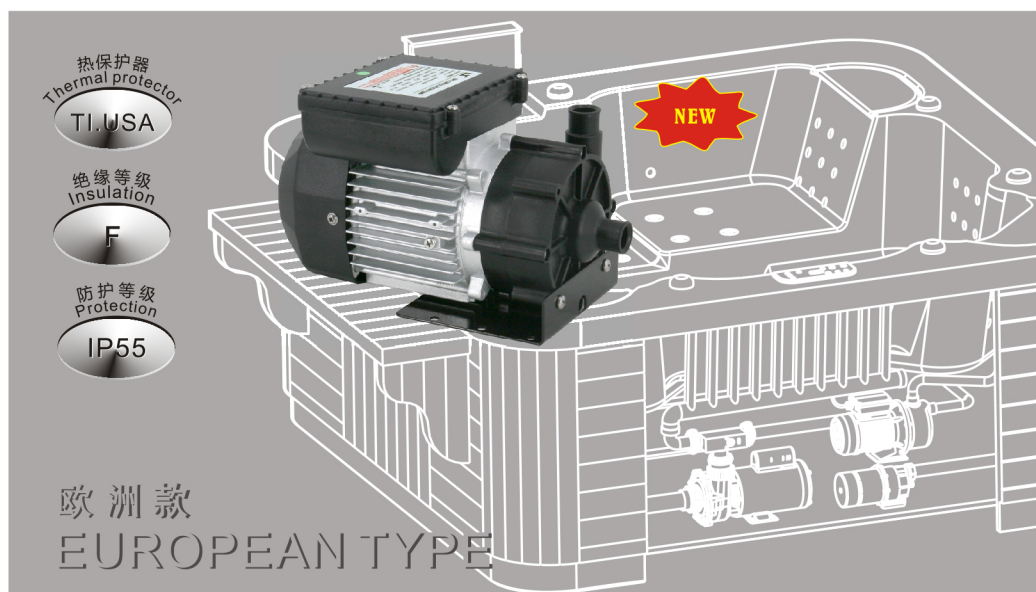

特点

1. 电泵过流部件采用高强度工程塑料，配以特殊碳化硅材质的机械密封；
2. 紧凑型设计，体积小，节省空间；
3. 噪音低，效率高，使用寿命长；
4. 电泵出水口方向可调（12点钟方向和9点钟方向）。

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (m³/h)	最大扬程 Hmax (m)	输入功率 Power(P ₁) W	电流 (Amps)		转速 Speed(rpm)		毛重 G.W (Kg)	包装尺码 Packing size (mm)
				220V	115V	50Hz	60Hz		
WE10	2.4	8.5	180	0.8	1.6	2900	3450	3.5	265×175×215

Features


- the flow of pump components using high strength engineering plastics, equipped with special sic mechanical seals;
- compact design, small size, save space;
- low noise, high efficiency and long service life;
- electric pump outlet direction adjustable (12 o'clock direction and 9 o'clock direction).

工作条件

介质温度: 0~+50℃
环境温度: ≤+50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 0~+50℃
Environmental temperature: ≤+50℃
Max. Working pressure: 0.3MPa

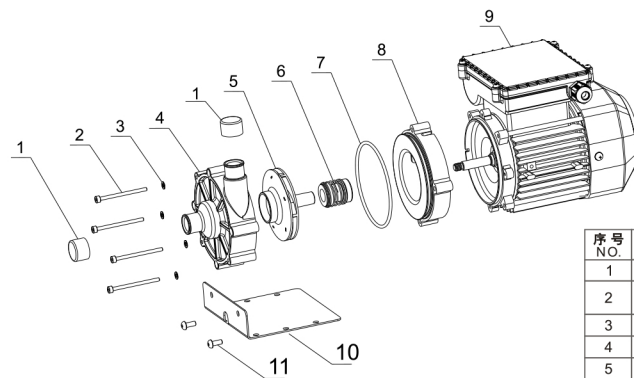

序号 NO.	名称 Name
1	防尘盖 Dust cap
2	内六角圆柱头螺钉 Hexagon socket head cap screw
3	平垫圈 Washer
4	泵壳 Pump Casing
5	叶轮 Impeller
6	机械密封 Mechanical Seal
7	O形圈 O-ring
8	泵盖 Pump Cover
9	电机 Motor
10	机脚 Bracket
11	十字槽盘头自攻螺钉 Cross recessed pan head tapping screws