


安装外形图 Overall dimension

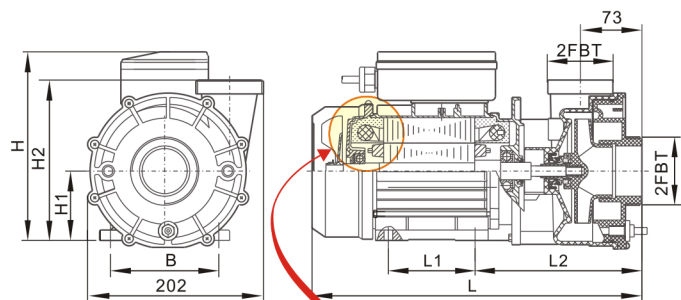

聚氨酯(PU)

*定子采用塑封工艺,防水性能好

*E级温升考核,温升低,寿命长;

- Stator under plastic craft, waterproof;
- E class of temperature rise, low temperature. Long life

型号 Model	外形尺寸 Shape size (mm)						
	L	L1	L2	B	H	H1	H2
LP35M	380	100	194.5	125	218	80	187
LP40M	380	100	194.5	125	218	80	187
LP35-IIM	431	125	197	140	140	90	197
LP40-IIM	431	125	197	140	140	90	197



浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

工作条件

介质温度: 5-50℃

环境温度: <75℃

最大工作压力: 0.3MPa



Working conditions

Medium temperature: 5-50℃

Environmental temperature: ≤75℃

Max. working pressure: 0.3MPa

性能曲线 Performance curves

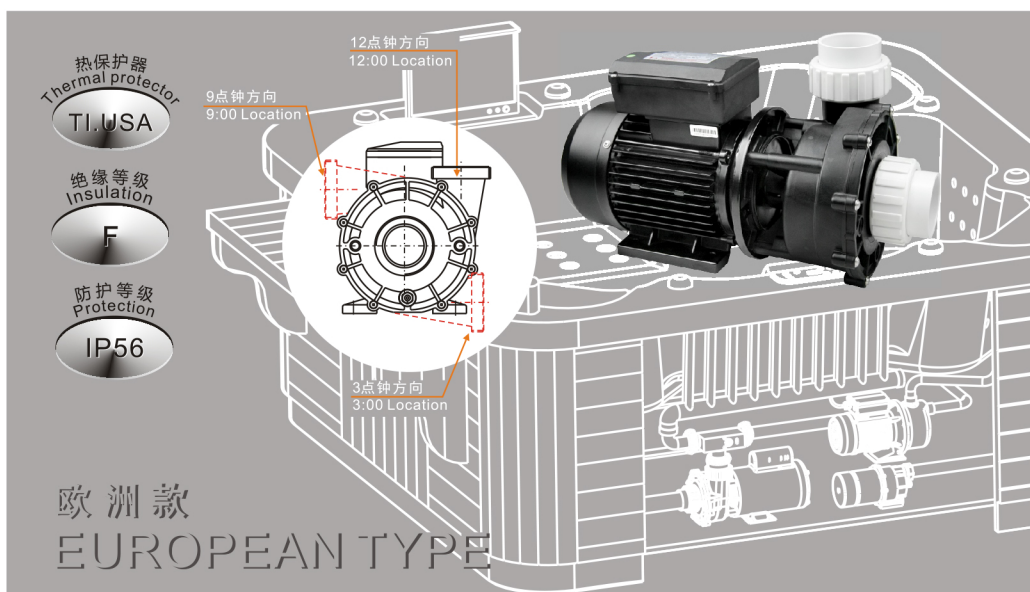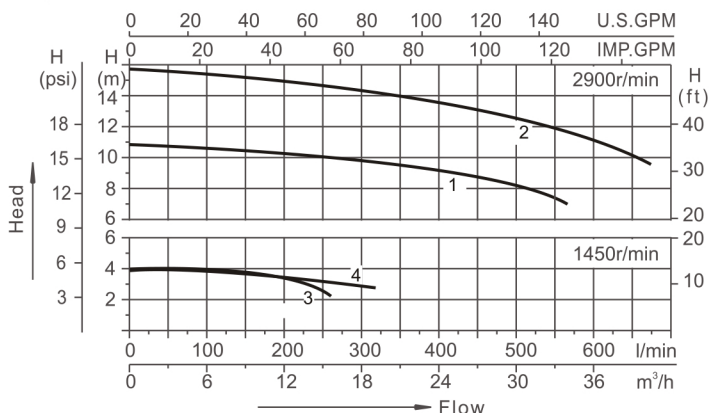

欧洲款
EUROPEAN TYPE

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P ₁) kW	HP	电流 Amps	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
LP35M	580	11	1	220-240/50	1.1	1.5	5.8	60.3or63	12.8	420×220×290
LP40M	670	15	2	220-240/50	1.85	2.5	8.5	60.3or63	16.2	420×220×290
LP35-IIM	260	3	3	220-240/50	(Low speed)0.25	0.35	2.5	60.3or63	17	470×220×290
	580	11	1		(High speed)1.1	1.5	5.8			
LP40-IIM	310	3.5	4	220-240/50	(Low speed)0.37	0.5	3.0	60.3or63	19.4	470×220×290
	670	15	2		(High speed)1.85	2.5	8.5			

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-Ring
4	注放水螺塞 Hexagon Screw
5	O形圈 Flat spacer
6	十字盘头螺钉组合件 cross raised head screw assembling
7	泵盖 Pump Cover
8	O形圈 O-Ring
9	叶轮 Impeller
10	机械密封 Mechanical seal
11	泵壳 Pump Casing

序号 NO.	名称 Name
12	平垫圈 Plain washer
13	六角螺栓 Plastic spacer
14	电机 Motor

